


Ride-On 3-Gang Reel Mower

SR370EU

SHIBAURA

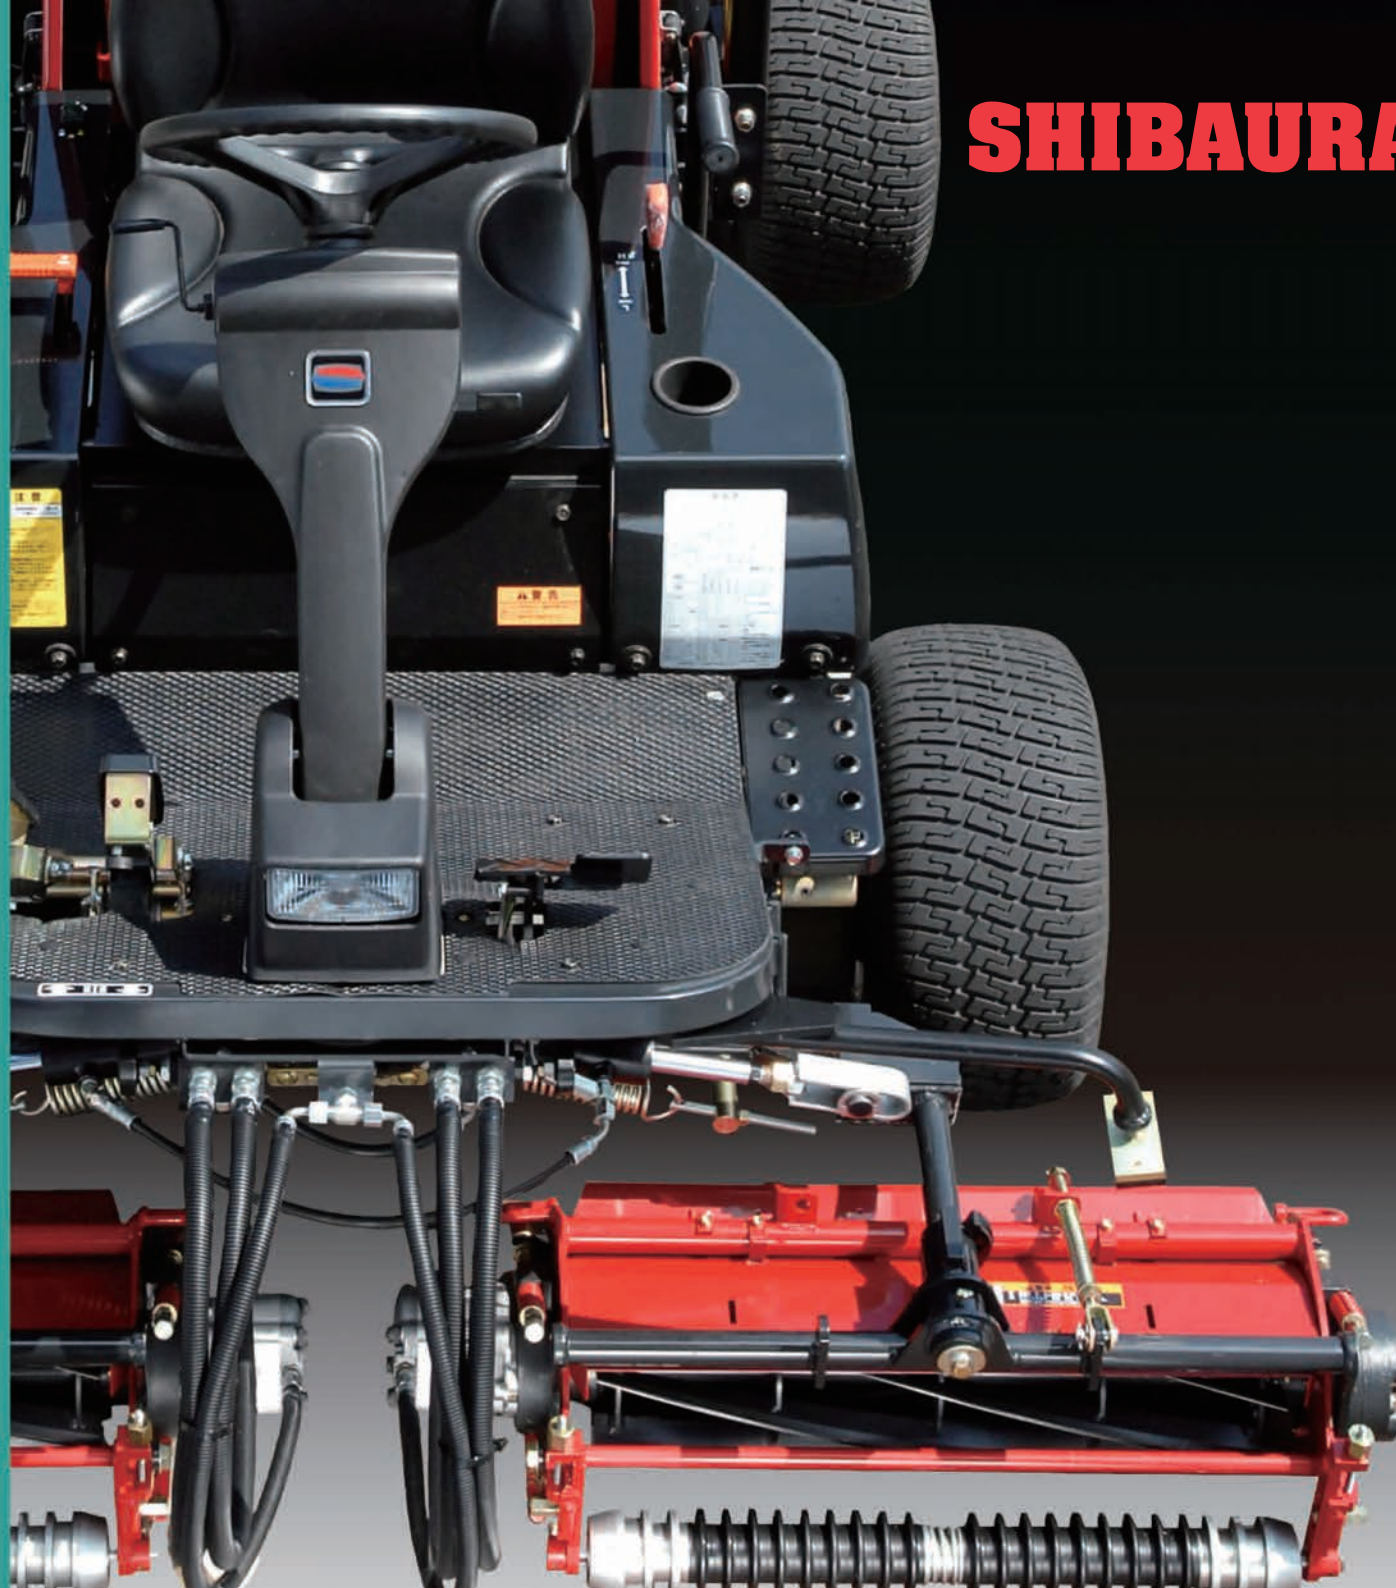

Multipurpose and high accuracy of cutting

sport fields

parks

fairways

High working efficiency, traveling quickly at the maximum speed of 18 km/h (2WD).
Excellent stability with its optimum balance of front and rear wheels & low gravity point design.
Great hill-climbing performance out of a high engine output and an optimum balance with the HST.

Reel up and down

It can be controlled by operators in safe and with ease without releasing a steering wheel

An individual pedal for forward and backward travel



Weight transfer system

It distributes its front reels load evenly by this system, contributing to more accurate cutting finish and higher performance of cutting on slop lands.

Down pressure spring system

It can minimize flaps of reels in high-speed work by suppressing reels onto the ground.

High followability of reels

SR370EU exerts its best performance on undulations with a large stroke of reels as well as quite short distance between front and rear reels.



Excellent stability on undulations


Designed of wide tread front wheels in conjunction with the lowest gravity point, SR370EU can perform uncompetitively on undulations. On top of that, SR370EU has very flexible turns with its short tread of rear wheels

High back seat

Designed to be good resistant to vibration for operator's comfort

4WD/2WD switchable lever

Easy maintenance (reel slide system)



SPECIFICATIONS

Model		SR370EU
Engine		
Model		SHIBAURA S773L
Type		watercooled 3 cylinder diesel
Horsepower (SAE hp (kw)) / (DIN hp (kW))		16.8 (29.4) / 16.8 (22.8)
Rated speed (rpm)		2600
Displacement (cc)		1130
Fuel tank capacity (l)		28
Dimensions		
Overall length (mm)		2500
Overall width (incl. reels) (mm)		2035
Overall height (incl. a steering) (mm)		1400
Weight (kg)		935
Tire size front		20 x 10.00-10
Tire size rear		20 x 10.00-10
Transmission		
Type & Drive		HST/ 2WD & 4WD switchable
Travelling speed forward (km/h)		0 - 9.0 / 0 - 18.0
Travelling speed reverse (km/h)		0 - 4.5 / 0 - 9.0
Shift Control		Dual Pedal
Steering		Hydraulic Power Steering
Parking brake		Pedal Lock
Reel Mower		
Total width of cut (mm)		1800
Reel Unit Diameter (mm)		178
Reel Unit Width (mm)		660
Number of blades		7 Blade-standard
Front Roller (mm)		ø 80 (grooved)
Rear Roller (mm)		ø 76.3 (solid)
Height of Cut (mm)		10 ~ 60
Option		Canopy / Protective Net/ Grass Catcher



Important information

Improper use of any product may cause serious or fatal injury. Read, understand and follow carefully the operating and safety instructions in your owner's manual before using such products.

We reserve the right to discontinue models or change specifications without notice.

SHIBAURA

SHIBAURA EUROPE BV

Begonialaan 7

NL - 6851 TE Huissen

Tel. (0031) 026 326 9999

Fax (0031) 026 326 9990

E-mail: info@shibaura.com

www.shibaura.com

Dealer: